




Project Name: _____

HIB LIGHT

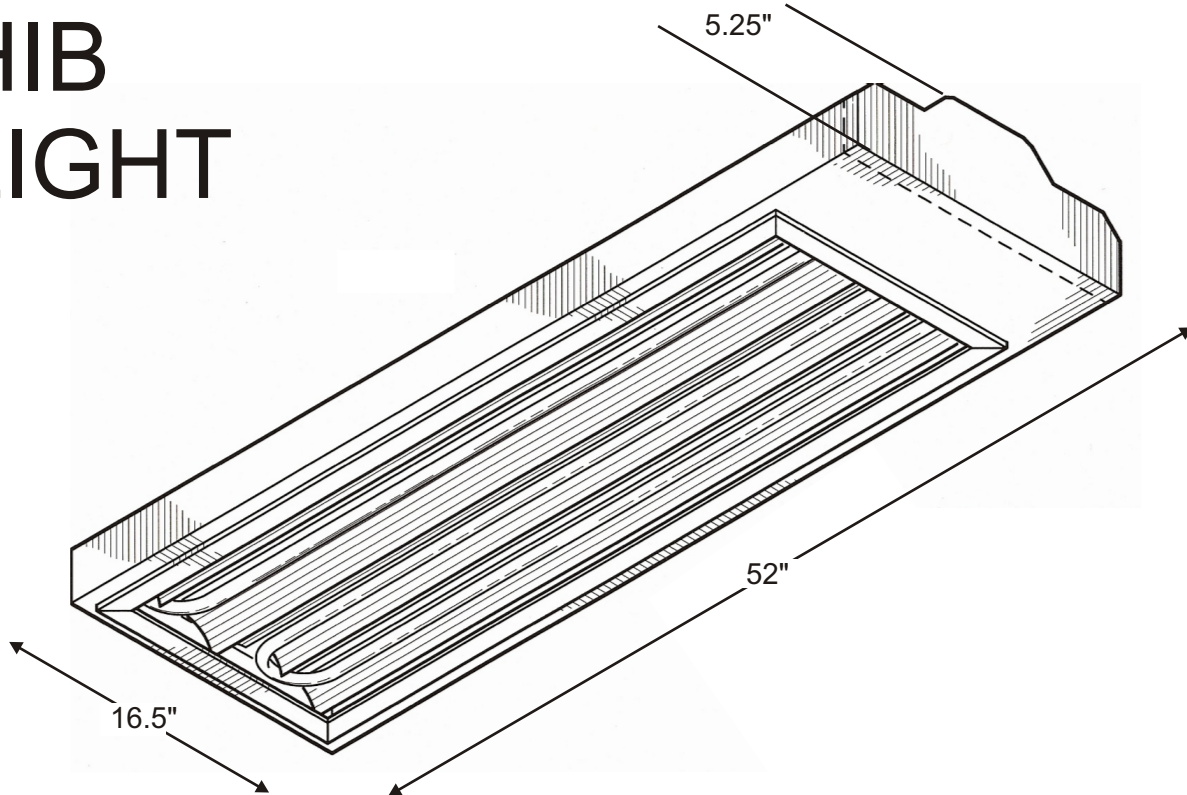

SQ- HIB - **CC** - **120** - **45** - **N**

SPECIFICATION GUIDE

	120 VOLT		D - DIMMING
	240 VOLT		N - NON-DIMMING
	277 VOLT		
<u>MODEL SERIES</u>	<u>VOLTAGE</u>		<u>CONTROL</u>
SQ- HIB	CC	120	45 - N
<u>LAMPING</u>		<u>COLOR</u>	
COLD CATHODE		24 - 2400°K	
		28 - 2800°K	
		30 - 3000°K	
		35 - 3500°K	
		45 - 4500°K	
		65 - 6500°K	

GENERAL NOTES

- 1) AVAILABLE FOR DIMMING AND NON-DIMMING APPLICATIONS. IF DIMMING AND ASSOCIATED CONTROLS BY OTHERS.
- 2) STANDARD LIGHTING COLOR OPTIONS: ONE OF SQUARE 1 PRECISION LIGHTING® STANDARD WHITE COLORS
- 3) VERIFY PRIMARY VOLTAGE FOR COMPATIBILITY.
- 4) FINISH WHITE, UNLESS OTHERWISE SPECIFIED.
- 5) INPUT: 134 WATTS